Instructions - Ceiling Mount Head


33CE008HEAD

WARNING! SEVERE PERSONAL INJURY AND PROPERTY DAMAGE CAN RESULT FROM IMPROPER INSTALLATION OR ASSEMBLY. READ THE FOLLOWING WARNINGS BEFORE BEGINNING.


- If you do not understand the instructions or have any concerns or questions, please contact a qualified installer
- Do not install or assemble if the product or hardware is damaged or missing. If you require replacement parts, contact your distributor for assistance.
- For ceiling mounted products: This product has been designed for use in a ceiling mounted configuration, defined by wood beams and joists 2 x 4 inches and greater. If you don't know your ceiling type, or for assistance with other surfaces (steel beams or concrete), contact a qualified installer. For safe installation, the ceiling you are mounting to must support 4 times the weight of the total load. If not, the surface must be reinforced to meet this standard. The installer is responsible for verifying that the ceiling structure/surface and the anchors used in the installation will safely support the total load. For Ceiling mounted products, professional installation is highly recommended.
- Do not use this product for any application other than those specified by the instructions.
- This product may contain moving parts. Use with caution.
- **DO NOT EXCEED THE MAXIMUM WEIGHT CAPACITY FOR THIS PRODUCT.**

Before you begin: The ceiling plate and the 1-1/2 inch NPT pipe (mast) are not included with this head. Install them first.

1 Attach the Horizontal Mount Plate(Part 2) to the U shaped adaptor bracket(Part 3) with the supplied 2 bolts(Part 5), nylon lock nuts(Part 6), and plastic alignment washers(Part 4).

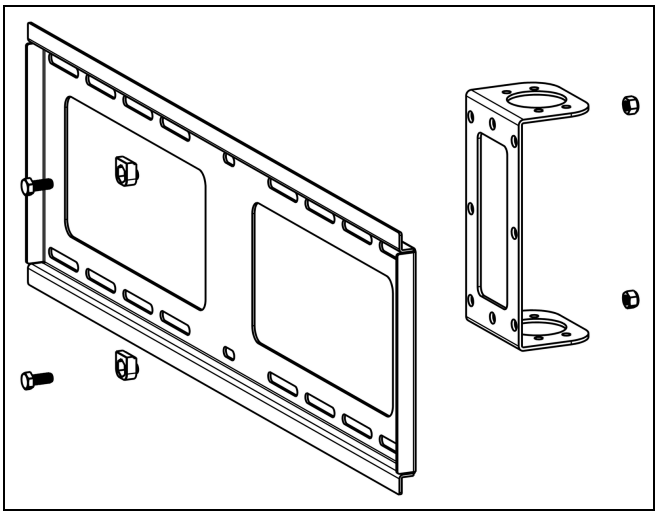



2 Slide the mast through the large holes in the U shaped adaptor bracket and thread the collar(Part 7) onto the end of the mast. Tighten the set screws(Part 8&9) only when you are sure the collar will not have to come back off.

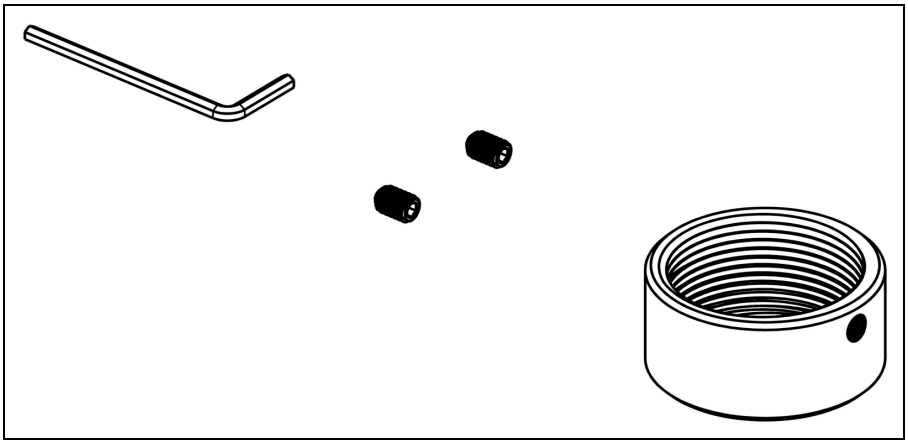


3 Mount Rails to the back of your Flat Panel using M-A to M-G Hardware Packs. Attach the upright rails to the TV/ Monitor at equal height. Use the supplied hardware to attach the rails to the TV. If your TV/ Monitor has recessed holes or an obstruction on the back that prevents the rail from sitting flush against the TV, use the spacers between the TV/ Monitor and the mounting rail. The screws should not be over tightened, nor should the screw bottom out.


4 Lift the TV and Hang onto wall plate. First hook the TV Rails(Part 11&12) over the top of the wall plate(Part 2). Then slide the locking bar in from the side(Part 10).

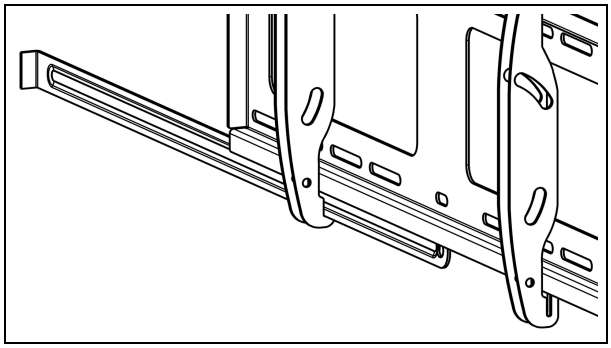

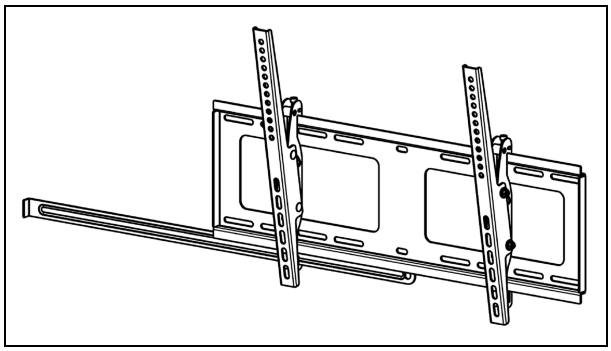

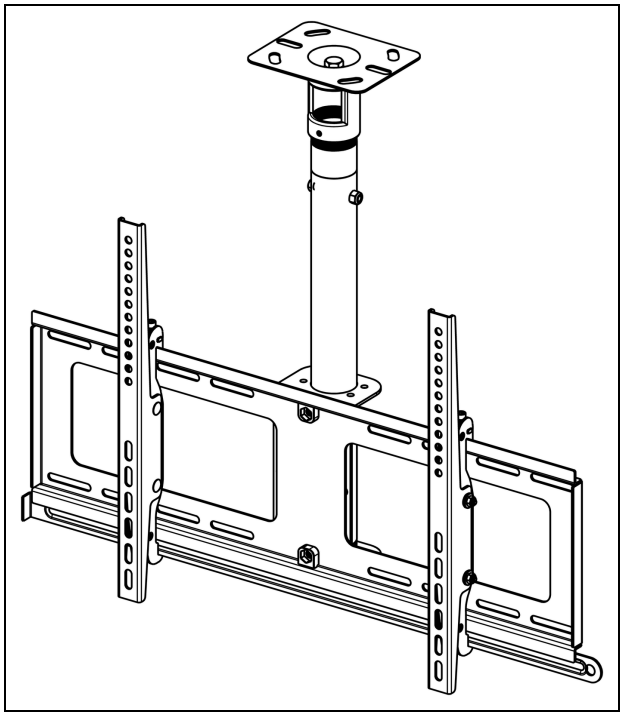


5 Level the TV. If the TV does not hang level, turn the leveling screw at the top of one TV rail with the supplied 5 mm hex wrench. Turning the screw raises or lowers that side of the TV. Adjust until the TV is level.

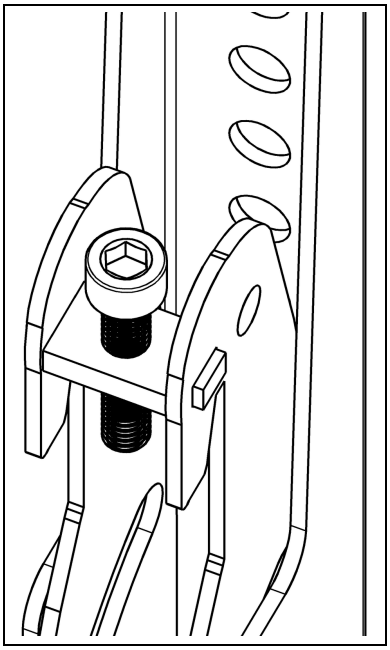

Pictures may not exactly represent the part(s) you are supplied.


M-A to M-G TV-Mount Hardware Pack — Parts List

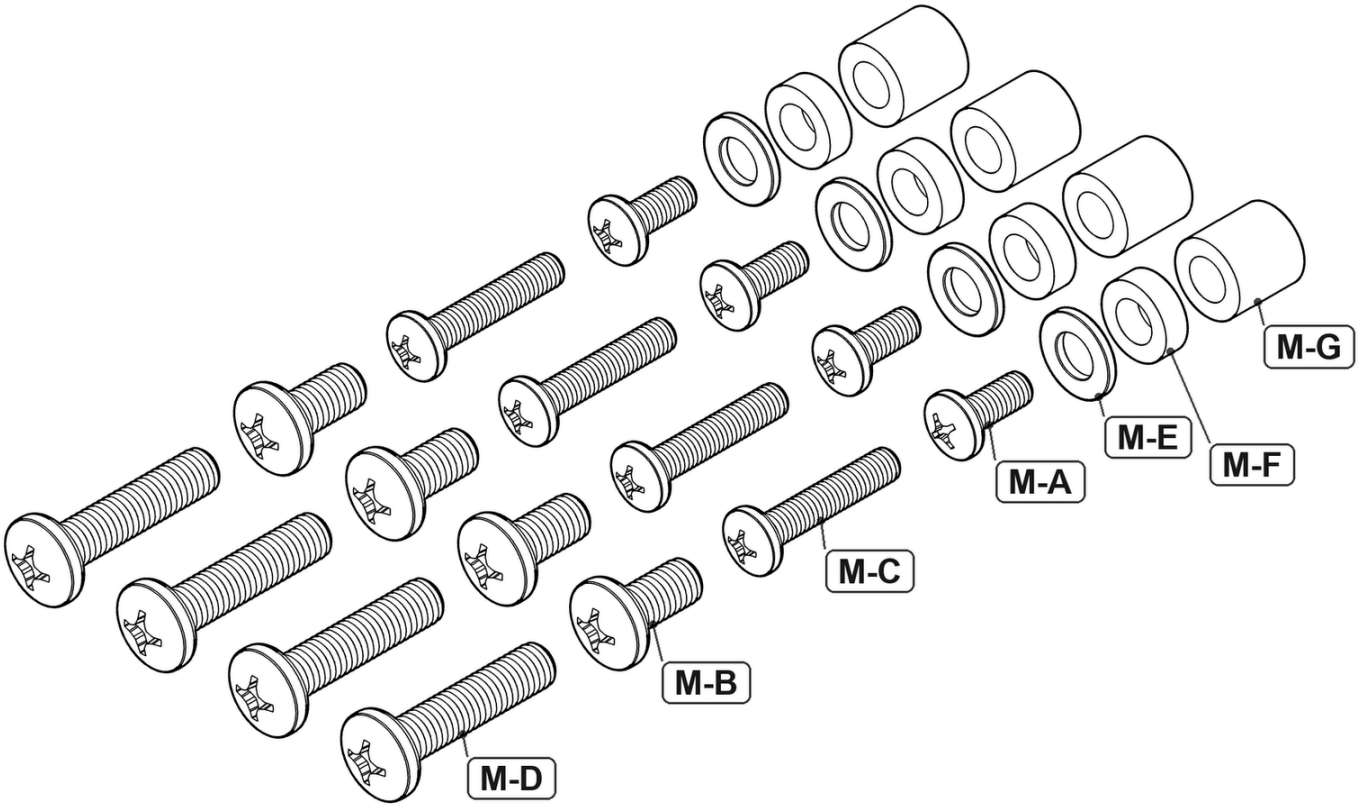

This hardware provided for attaching mount to TV

ITEM	PART NAME	LABEL	DESIGNATION	QTY
1	Machine screw M6 x 14, pan head	M-A		4
2	Machine screw M8 x 16, pan head	M-B		4
3	Machine screw M6 x 30, pan head	M-C		4
4	Machine screw M8 x 35, pan head	M-D		4
5	Washer M8	M-E		4
6	Plastic spacer M8 x 5 mm	M-F		4
7	Plastic spacer M8 x 15 mm	M-G		4

33CE008HEAD TV Ceiling Mount Head - Parts List

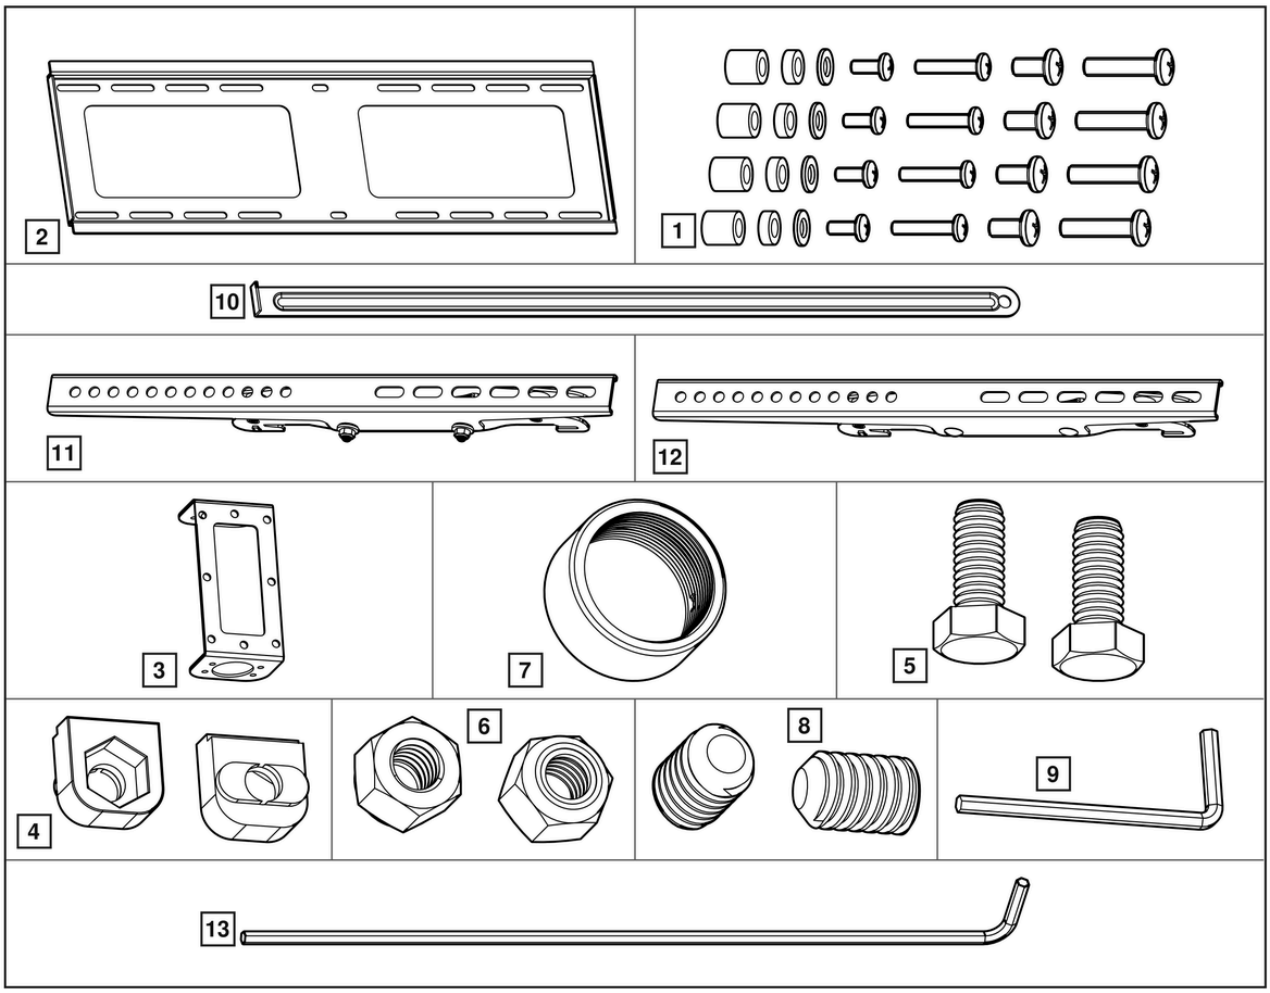

ITEM	PART NAME	DESIGNATION	QTY
1	Hardware pack (M-A to M-G)		1
2	Wall plate		1
3	NPT adapter	PP-0001	1
4	Plastic alignment washer	FB-0007	2
5	Hex bolt 5/16-18 x 3/4	HW-0001	2
6	Nylon locking nut 5/16-18	HW-0002	2
7	Pipe socket collar	PP-0002	1
8	Set screw 1/4-20 x 3/8	HW-0107	2
9	Hex wrench, 1/8 inch (for the set screws)	HW-0095	1
10	Lock bar		1
11	TV tilt rail assembly, left		1
12	TV tilt rail assembly, right		1
13	Hex wrench, 5 mm (for the leveling screws)		1