

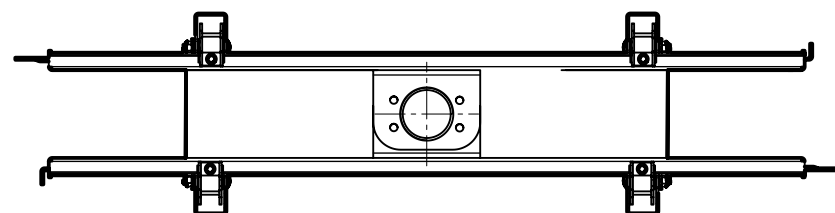


NOTES

1. Shown at 0° tilt, as the head hangs on a plumb 1-1/2 (1.5) in pipe: two tilting heads back to back, their NPT adapters stacked on the pipe (the far head sits .118 higher).
2. Each screen tilts 10° down and 5° up; rotates a full 360° (store rating).
3. Fits TV mounting-hole patterns (VESA) 50 to 700 mm wide x 75 to 400 mm high on each side (store rating). The TV rails slide on the plate to suit the TV: rail spacing 50 to 700 mm (drawn at 400 mm).
4. Pipe socket: the threaded collar under the lower NPT adapter (detail B), 1-1/2 (1.5) NPT internal thread, with a 1/4-20 set-screw hole.
5. Head centre = the vertical centre of each head's TV rails (dash-dot lines on the front and side views). TV rail holes and slots: detail A, in mm (all four rails alike).
6. Shown with its hardware: M6 x 1 carriage bolts with nylon-insert locknuts at the tilt pivots; M6 x 1 socket-head screws at the leveling blocks; 5/16-18 x 3/4 hex bolts with nylon-insert locknuts joining each wall plate to its NPT adapter.


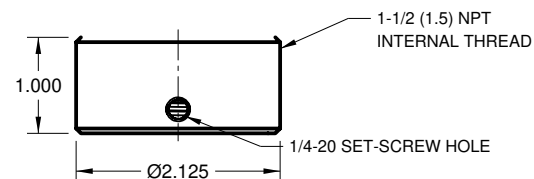


TOP VIEW

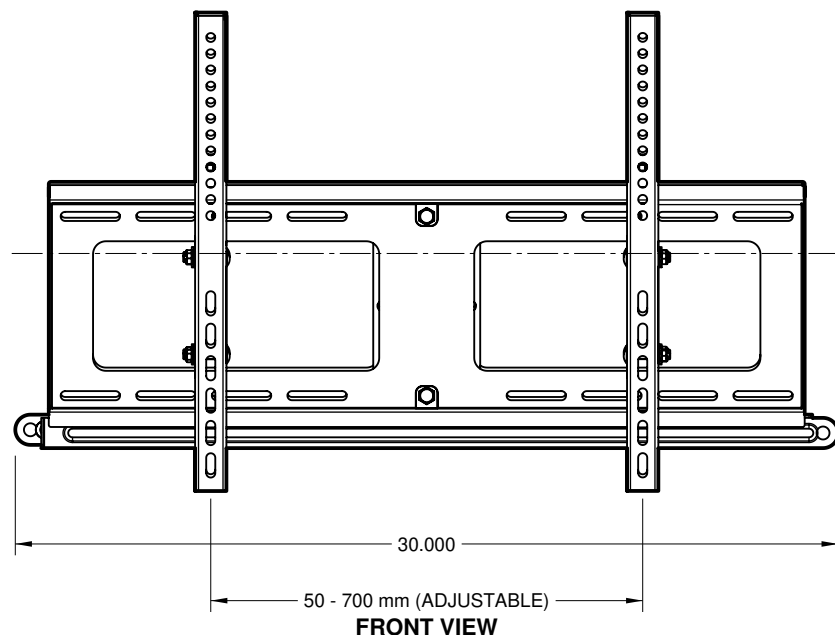


DETAIL B

PIPE SOCKET COLLAR
SCALE 1:2

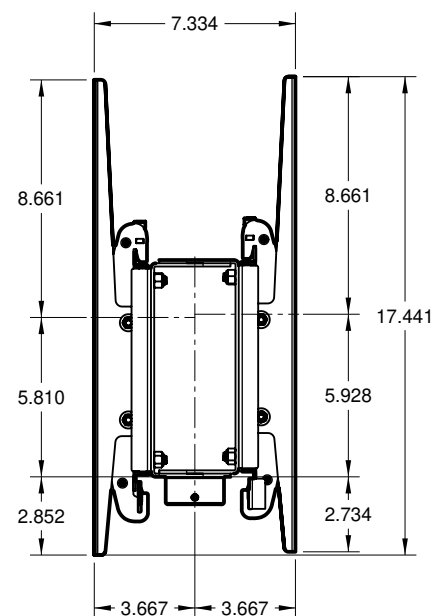

ISOMETRIC VIEW

REFERENCE ONLY - NOT TO SCALE

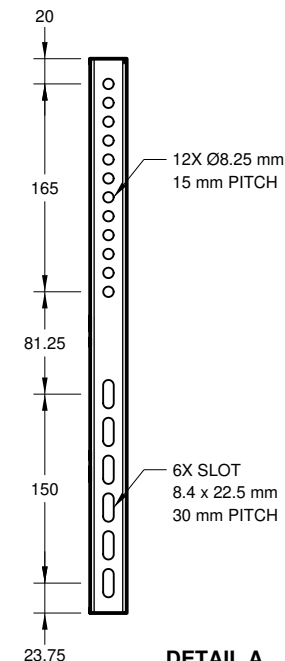

DETAIL A

TV RAIL (ALL FOUR)
SIZES IN mm
SCALE 1:6



33CE028HEAD DIMENSIONED DRAWING

Back to Back TV Ceiling Mount Head for 32 to 86 inch, Tilt and Rotate

Two screens back to back · 250 lb combined · Tilt 5° up / 10° down · VESA 50-700 x 75-400 mm

Expert Mounts

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

DIMENSIONS

INCHES, EXCEPT TV MOUNTING
HOLES/SLOTS IN mm

SCALE 1:7 UNLESS NOTED

DATE 2026-09-28

SHEET 1 OF 1

REV A