

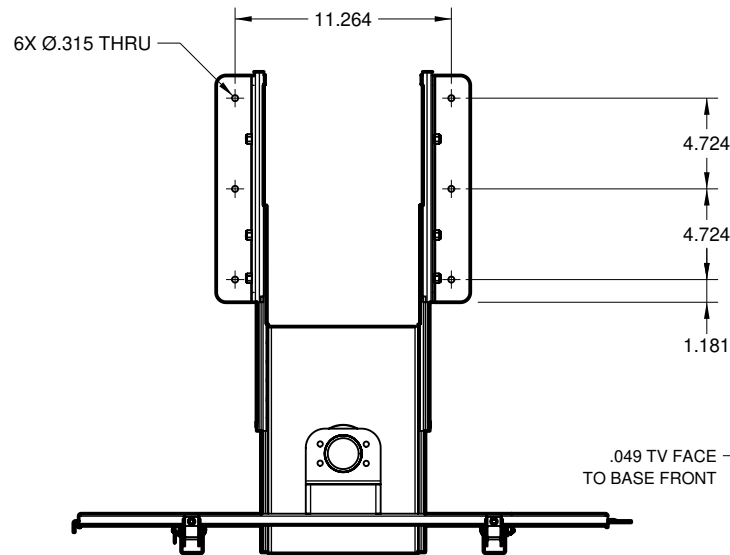


TOP VIEW

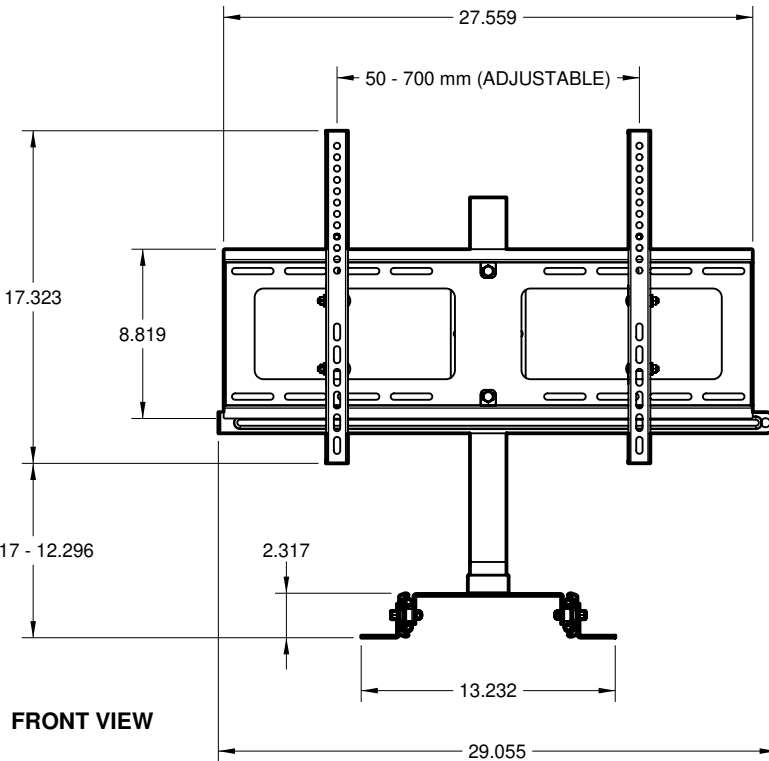


RIGHT SIDE VIEW - COLLAPSED

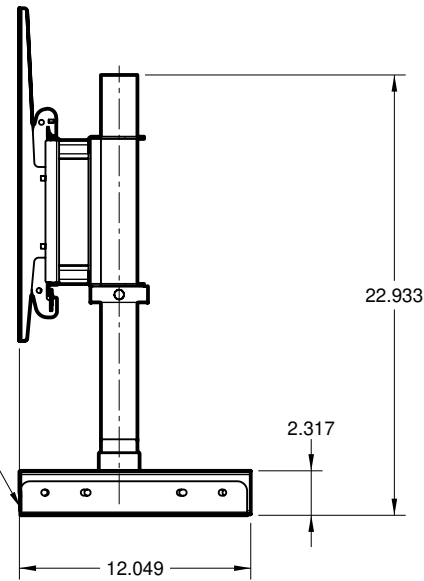



FRONT VIEW

RIGHT SIDE VIEW - EXTENDED

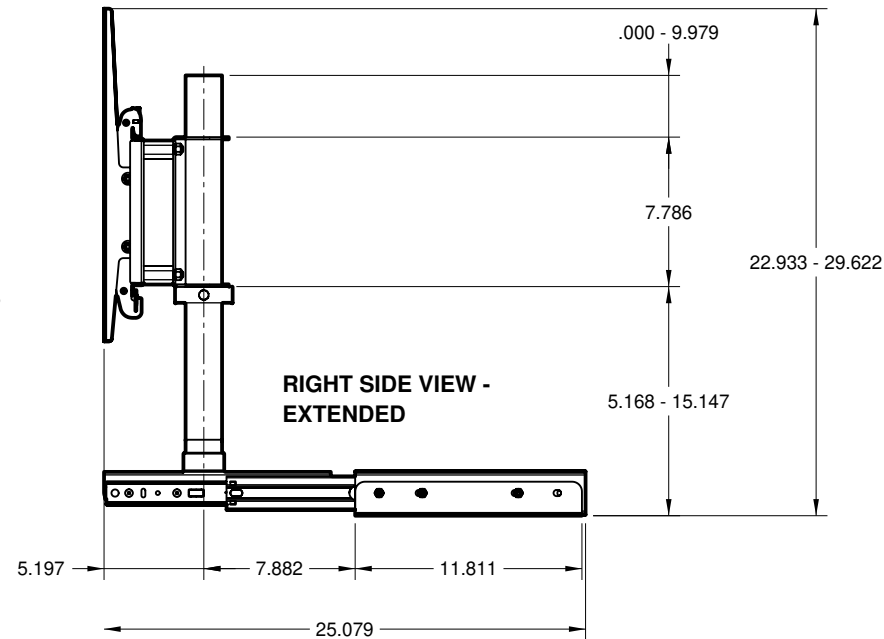

## NOTES

1. Shown fully extended, 0° tilt, 0° swivel, head at a mid-height clamp position.
2. Head adjusts 9.979 on the pipe; heights given as low - high are set by the head clamp position.
3. Lowest head position: TV rail bottoms level with the top of the base (2.317 above the mounting surface). The TV's bottom edge must be above 2.317 to swivel clear of the base.
4. Fits TV mounting-hole patterns (VESA) 50 to 700 mm wide x 75 to 400 mm high. TV rails slide on the wall plate to suit the TV: rail spacing 50 to 700 mm (drawn at 400 mm).
5. Slide travel 13.030. Collapsed overall depth 12.049.
6. Pipe: 1-1/2 (1.5) in schedule 40, Ø1.900 OD x 20.000 long.

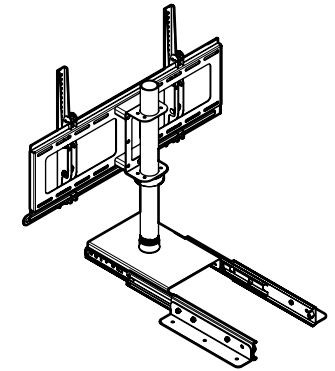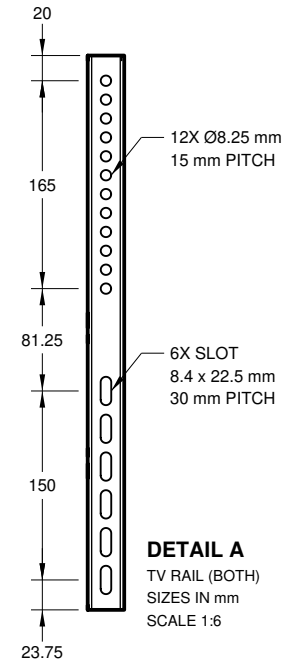ISOMETRIC VIEW  
REFERENCE ONLY - NOT TO SCALEDETAIL A  
TV RAIL (BOTH)  
SIZES IN mm  
SCALE 1:6**33SL001** DIMENSIONED DRAWING

Cabinet/Furniture Slide Out Swivel TV Mount for up to 65 Inch

32-65 in screens · 100 lb capacity · Tilt 5° up / 10° down · VESA 50-700 x 75-400 mm

**Expert Mounts**

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

**DIMENSIONS**INCHES, EXCEPT TV MOUNTING  
HOLES/SLOTS IN mm**SCALE** 1:10 UNLESS NOTED**DATE** 2026-09-29**SHEET** 1 OF 1**REV** D