



NOTES

1. Fits beams that are 2-1/2 to 14-1/2 inches wide (store). The strut's top face bears on the beam flange and a beam clamp hooks over each flange edge; the clamp and adapter positions along the strut are set on installation.
2. Strut channel 1-5/8 x 1-5/8 x 18.000 long; slot opening .875; 9X .562 x 1.125 slots on 2.000 centres in the face that bears on the beam.
3. Unistrut adapter (as 11UN001): plate 2.250 x 4.500; pipe socket 1-1/2 (1.5) NPT internal thread, side window 1.020 x 1.655, 1/4-20 set-screw hole.
4. Jaw depth .750 is the clamp body's fixed jaw. Shown with the adapter's channel nut and two 3/8-16 x 1-1/4 hex bolts and the beam clamps' 3/8-16 clamp screws in place.

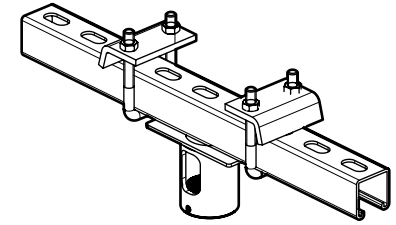


ISOMETRIC VIEW
REFERENCE ONLY - NOT TO SCALE

TOP VIEW

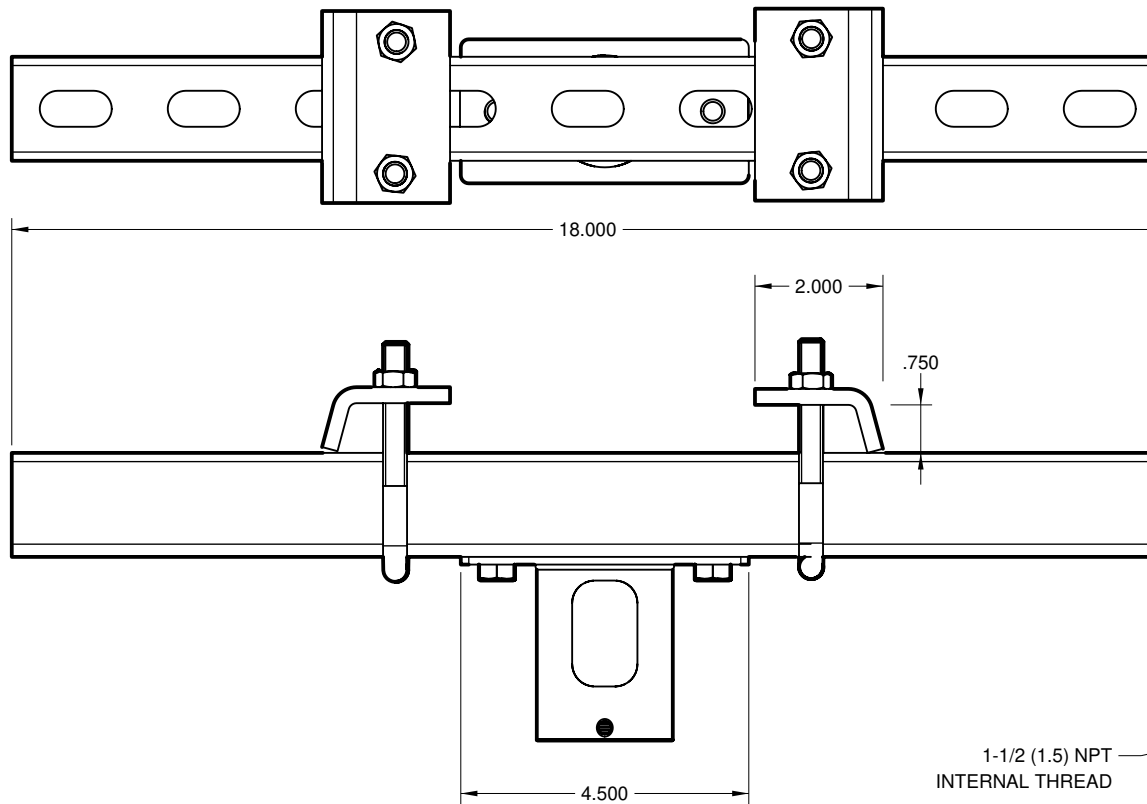

FRONT VIEW

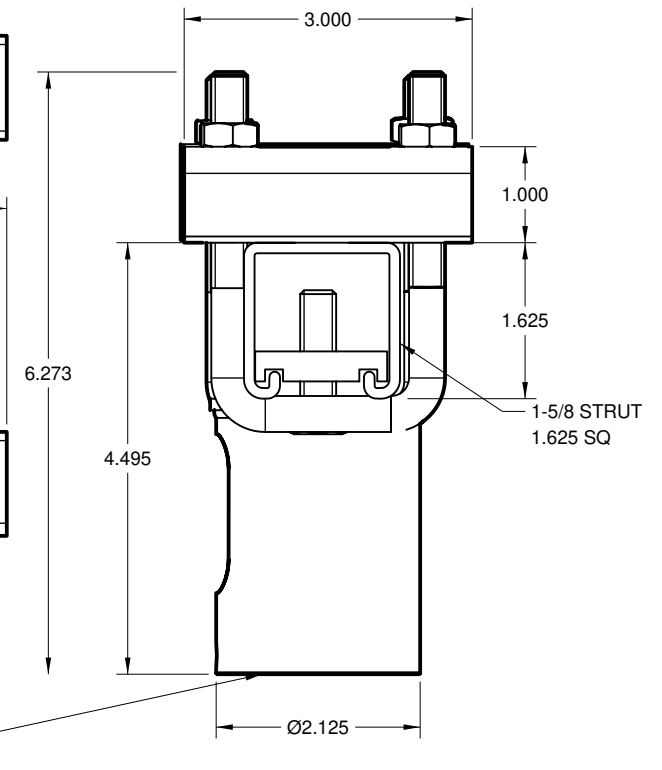

RIGHT SIDE VIEW

SCALE 1:2



11BC001 DIMENSIONED DRAWING

Beam Clamp for 1-1/2 Inch Pipe

For 1-1/2 (1.5) in pipe · 500 lb weight rating · Fits beams 2-1/2 to 14-1/2 in wide

Expert Mounts

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

DIMENSIONS	INCHES
SCALE	1:3 UNLESS NOTED
DATE	2026-09-28
SHEET	1 OF 1
REV	C