

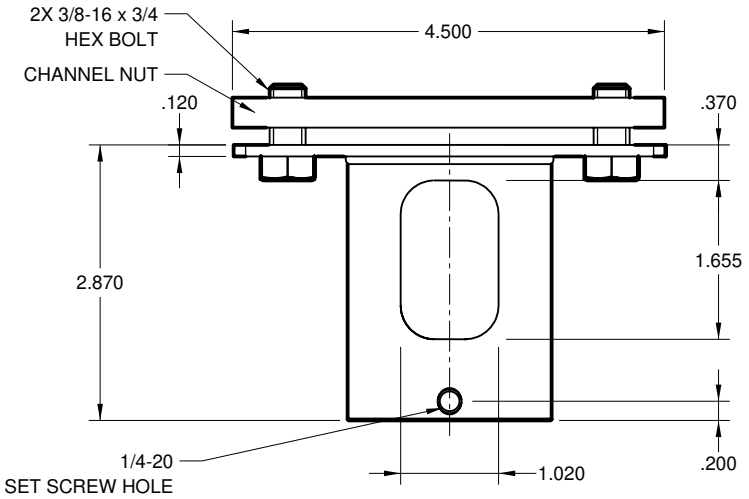


FRONT VIEW

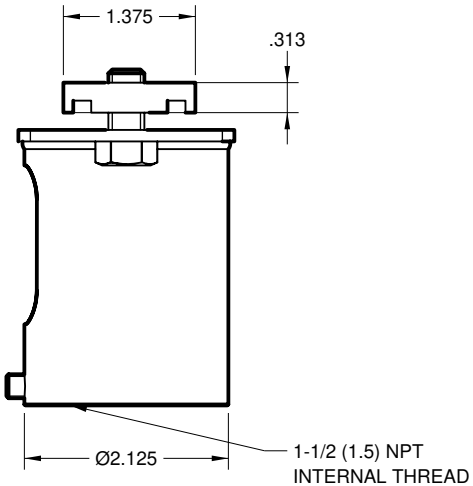

RIGHT SIDE VIEW

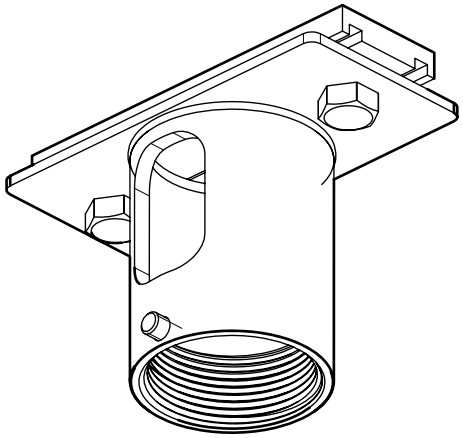


ISOMETRIC VIEW


REFERENCE ONLY - NOT TO SCALE

NOTES

1. Shown assembled as installed: the plate's top face seats against the underside of the strut channel's lips, the channel nut sits inside the channel and the two bolts clamp the lips between nut and plate. Strut channel not included.
2. Nut and bolt positions are taken from the 11BC001 beam clamp, where the same adapter is modelled installed in a strut channel. The set screw is shown threaded in, clear of the pipe bore.
3. Bottom view: 2X Ø.375 holes 3.375 apart on the plate centreline; Ø1.750 bore.
4. Pipe socket: 1-1/2 (1.5) NPT internal thread; side window 1.020 x 1.655 with R.350 corners; 1/4-20 set-screw hole.

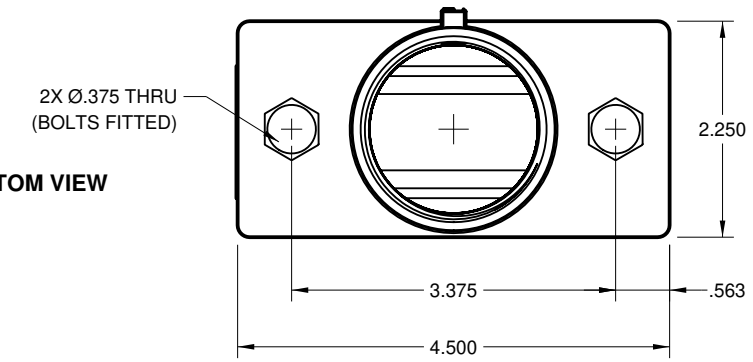

BOTTOM VIEW

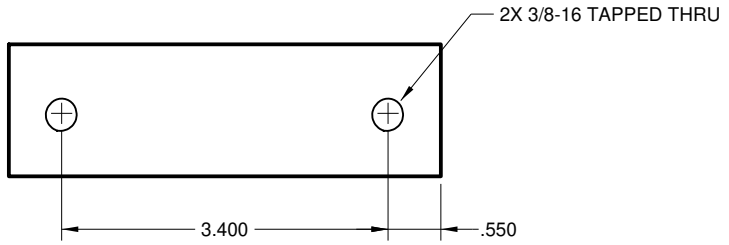

CHANNEL NUT - TOP VIEW

11UN001 DIMENSIONED DRAWING

Unistrut Adapter for 1 1/2 Inch NPT Pipe

For 1-1/2 (1.5) in NPT pipe · 500 lb capacity · Mounts to Unistrut (strut not included)

Expert Mounts

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

DIMENSIONS	INCHES
SCALE	1:2 UNLESS NOTED
DATE	2026-10-20
SHEET	1 OF 1
REV	D