




DETAIL A
TV RAIL (2X)
HOLES IN mm
SCALE 1:8

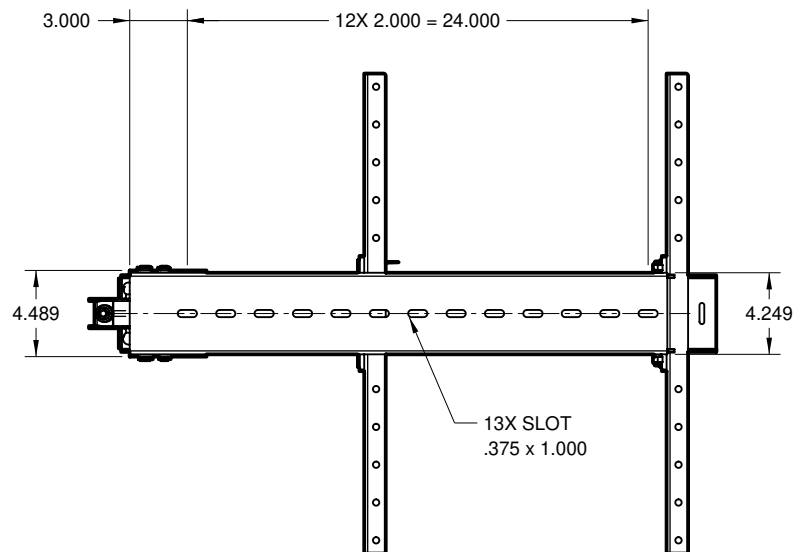


TOP VIEW - FOLDED

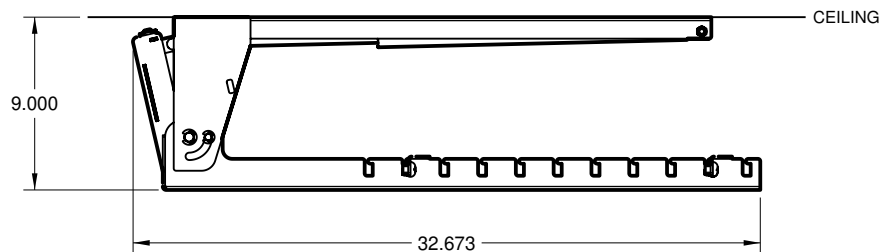

SIDE VIEW - FOLDED

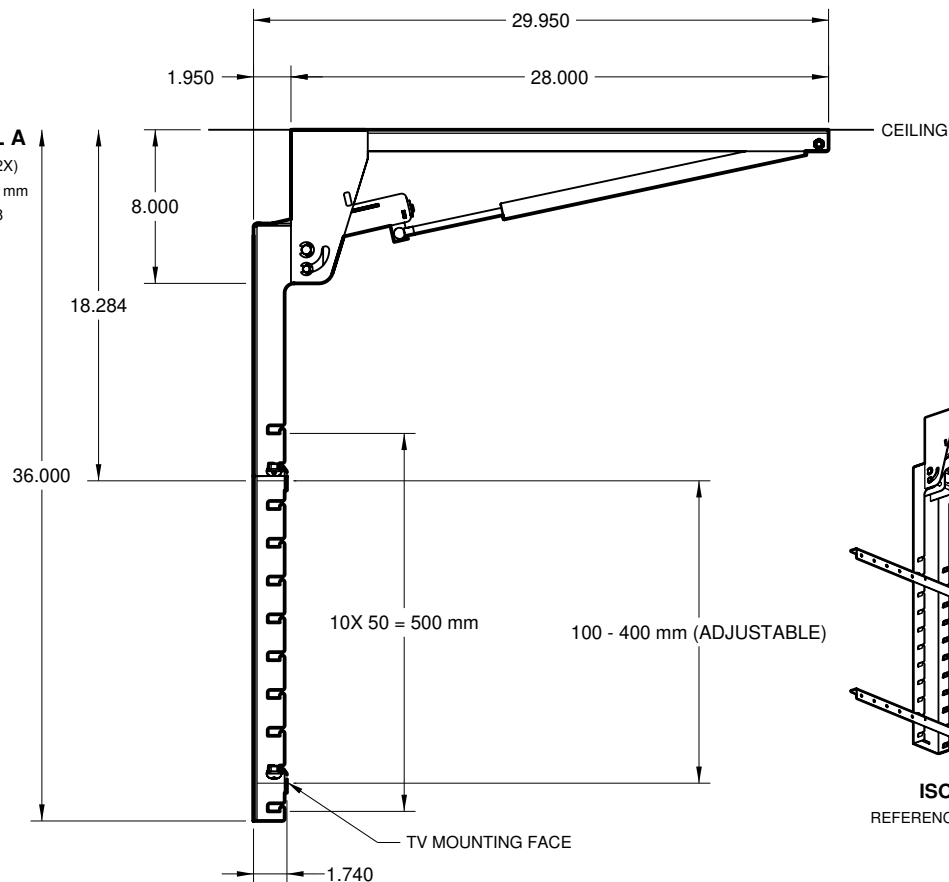

SIDE VIEW - UNFOLDED

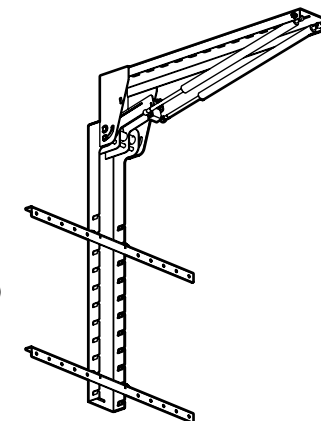

ISOMETRIC VIEW
REFERENCE ONLY - NOT TO SCALE

NOTES

1. Folded (retracted): stowed against the ceiling with the TV screen facing the ceiling. Unfolded: the drop arm hinges down 90°. Both views drawn with the TV rails in notches 2 and 10 or 400mm apart; TV not shown.
2. Mount on a flat, horizontal ceiling only. Ceiling fasteners go through the slots on the channel centre line.
3. Folded, the mount extends 9.000 below the ceiling and the TV is inside the mount.
4. Unfolded, the hinge plates end 8.000 below the ceiling, so the top of the screen sits at least 8 in below the ceiling. Add the TV's height to estimate where the bottom of the screen lands.
5. Height adjustable in roughly 2 in (50 mm) increments: each TV rail hooks into any of the 11 notches in the drop arm, 50 mm apart.
6. Fits TV mounting-hole patterns (VESA) 200 to 600 mm wide x 100 to 400 mm high. Rail holes give 200/300/400/500/600 mm wide patterns; the rail spacing is set by the notches: 100 to 400 mm (drawn at 400 mm).
7. Gas struts carry the TV, up to 100 lb; the support adjusts to the TV's weight. Hardware shown as assembled: gas-strut ball studs 5/16-18, support-adjusting screw 3/8-16.
8. Includes 2 x 5/16 x 3 hex lag screws and 2 x 5/16 fender washers for fastening the mount to the ceiling.



33FD001 DIMENSIONED DRAWING

Flip Down Folding TV Ceiling Mount for 32 to 70 Inch Screens

32-70 in screens · 100 lb capacity · Folds down 90° · VESA 200-600 x 100-400 mm

Expert Mounts

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

DIMENSIONS	INCHES, EXCEPT TV RAIL HOLES AND NOTCHES IN mm
SCALE	1:10 UNLESS NOTED
DATE	2026-10-02
SHEET	1 OF 1
REV	B