




NOTES

1. Shown at 0° tilt, as the head hangs on a plumb 1-1/2 (1.5) in pipe: two tilting heads back to back on one pipe socket.
2. Tilts up to 12° down and 5° up, rotates 360° (store rating).
3. Fits TV mounting-hole patterns (VESA) 75 to 400 mm wide x 75 to 400 mm high on each side (store rating). The TV rails slide on the plate to suit the TV: rail spacing 75 to 400 mm (drawn at 400 mm).
4. Pipe socket: 1-1/2 (1.5) NPT internal thread; M6 x 1 set-screw hole at the back of the socket, .400 below its top.
5. Head centre = the horizontal centre line of the adapter plates (dash-dot line on the front and side views). TV rail holes and slots: detail A, in mm (all four rails alike).
6. Shown with its hardware: M14 x 2 hex bolt, locknut and cotter pin at the swivel; M6 x 1 carriage bolts with nylon-insert locknuts at the tilt brackets; M6 x 1 socket-head screws at the rail tabs.




ISOMETRIC VIEW
REFERENCE ONLY - NOT TO SCALE


TOP VIEW

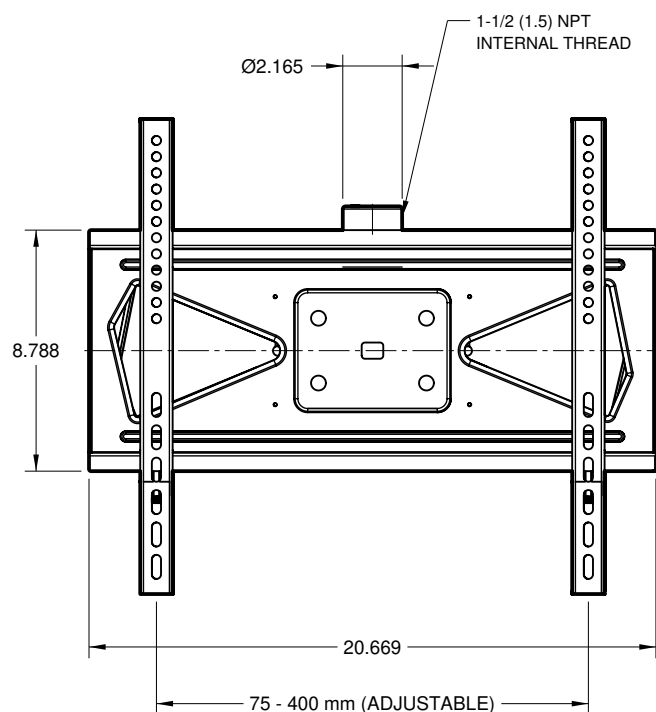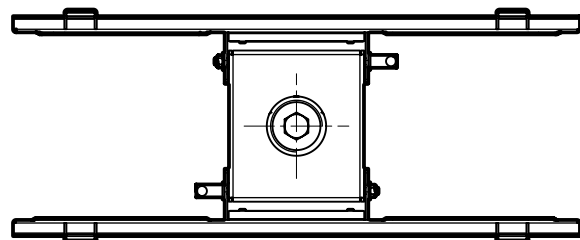

FRONT VIEW

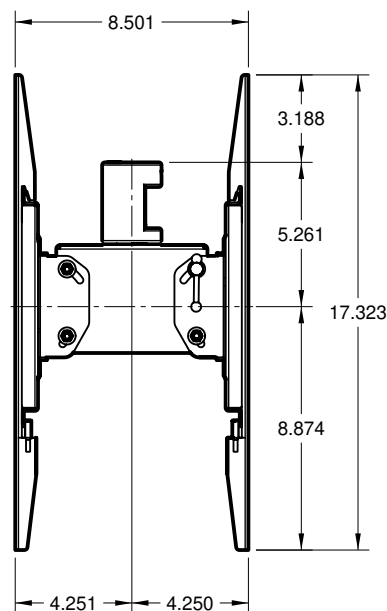

RIGHT SIDE VIEW

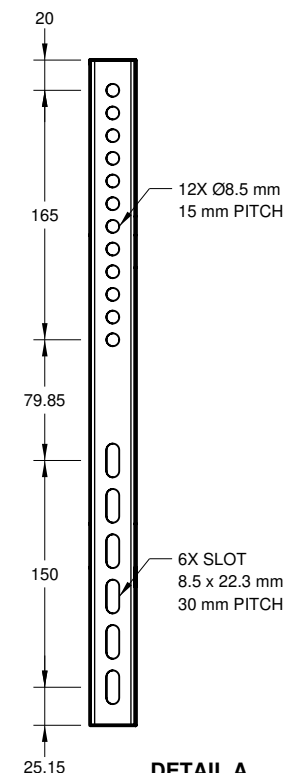

DETAIL A

TV RAIL (ALL FOUR)
SIZES IN mm
SCALE 1:5



33HE021 DIMENSIONED DRAWING

2 Screen Back to Back TV Ceiling Mount Head for - 1 1/2 Pipe - 400x400mm

32-70 in screens · 110 lb max weight · Tilt 5° up / 12° down · VESA 75-400 x 75-400 mm

Expert Mounts

Video Mount Store · videomountstore.com

sales@videomountstore.com

PHONE: 800-585-8795

DIMENSIONS INCHES, EXCEPT TV MOUNTING HOLES/SLOTS IN mm
SCALE 1:7 UNLESS NOTED
DATE 2026-09-28
SHEET 1 OF 1
REV A